

Product Description

Superior interior/exterior one-part medium modulus moisture curing silicone sealant. **DYNA-PRO® Sanitary** is fungus and mildew resistant and exhibits excellent resistance to aging, shrinkage, moisture, cracking and discoloring. It does not contain solvent.

- Fungus and mildew resistant
- 100% silicone polymer
- Excellent elasticity
- Solvent-free
- Excellent resistance to shrinkage, cracking and discoloring
- Resistant to aging, ultra-violet radiation and temperature extremes
- Usable life of 12 months from date of production, when stored at or below 25°C in the original unopened container

DYNA-PRO® Sanitary is an acetic system sealant suitable for sanitary or other construction sealing applications where mildew resistance is required.




Surface Preparation

Surfaces must be clean, dry and free from grease, dust and frost. In case of renovation work, old sealant as well as old paint must be removed completely. Surface should be cleaned with a suitable solvent for the substrate such as DYNA-PRO® Silicone Cleaner, isopropanol etc.

Instructions

This sealant is ready to use. After suitable joint preparation and masking using Dyna-Pro® All-purpose white masking tape, the sealant is gunned into place and tooled within 5 minutes, using a spatula which has been dipped in soapy water. Masking tape is then removed immediately. Uncured material can be removed using a suitable solvent or an approved sealant remover. Cured material may be removed by abrasion or other mechanical means. Do not expose the sealant to water for at least 24 hours.

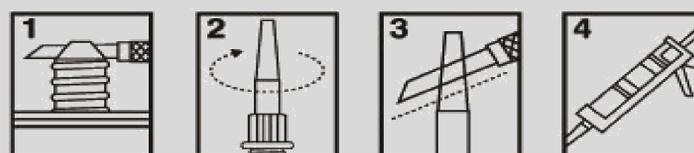

Priming

This product features adhesion to a variety of non-porous substrates; however, for specific substrates, priming may be necessary to improve adhesion. Please consult our Technical Service Department.

Technical data

| Characteristic | Value | Unit | Lower Limit | Upper Limit |
|-------------------------------|---|---------|-------------|-------------|
| Skin over time | 12 | Min | 8 | 20 |
| Extrusion Rate 20°C 6.2Kg/cm2 | 223 | g/min | 170 | 270 |
| Durometer Shore A, 3d/RT | >= 18 | Shore A | 18 | |
| Tensile 3d/RT | >= 1.55 | Mpa | 1.55 | |
| Cure System | Acrylic | | | |
| Standard Colors | White, Black, Bronze, Beige, Grey, Orange-Brown, etc... | | | |
| Elongation 3d/RT | >= 450 | % | 450 | 30 |

Limitations

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that DYNA-PRO® products are safe, effective, and compatible for the intended end use. Sole warranty is that the product will meet the DYNA-PRO® sales specifications in effect at the time of delivery. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.